

Heat Health Warning System in Germany – Implementation of city issues

Andreas Matzarakis¹, Research Centre Human Biometeorology, German Meteorological Service
(Germany)

Stefan Muthers, Research Centre Human Biometeorology, German Meteorological Service
(Germany)

ABSTRACT

After the heat waves in the year 2003 and the statements of IPCC about the increase and the related consequences several countries in Europe decided to develop or implement a Heat Health Warning System (HHWS) and provide information for general public and public health. In Germany, weather Forecast is used to predict heat episodes, which are associated with negative health impacts. Therefore, a heat balance model of the human body and an extracted equivalent temperature (Perceived Temperature) is applied. Thresholds for strong and extreme heat stress based on thermal perception classification are used and build the first approach of the HHWS. Furthermore, the threshold of strong heat stress includes a short term adaptation component and considers the previous thermal stress conditions of the last 30 days. The second step includes nocturnal conditions, based on forecasted minimum air temperature or a simulated maximum indoor temperature for typical houses. Both criteria are important for the decision about warnings for the present and next days. Warnings are generated by daily weather forecast automatically and are additionally confirmed or adjusted by a biometeorological forecaster. The warning is valid on county level considering several elevation classes. The heat warning is available as a map on the internet and registered users can receive information by a daily newsletter. A specific smartphone app is also available for general use. The main target groups are the public, nursing homes and ministries of the federal states and other authorities.

Introduction

There is evidence that heat has a big influence on human health especially on mortality and morbidity. The 2003 heat waves led to a significant increase in the number of fatal casualties (IPCC 2007; Matzarakis et al. 2011; Larsen 2006). Due to the climate change in the future both the frequency and intensity of heat waves is expected to increase, which will lead to a rise in heat-related mortality (Matzarakis et al. 2011; Muthers et al. 2010), with the main risk for the elderly, chronically ill, very young children and socially isolated people (Koppe 2009).

In Germany the HHWS is based on a thermal index (Perceived Temperature) and the impact analysis is based on the quantification how the different thermal stress categories impact on human health, and when it is necessary to issue a warning, and analysis of mortality data from various European regions (Koppe 2005; Koppe and Matzarakis 2016; Matzarakis, 2017). As the morbidity data available is often inadequate, unfortunately, total mortality can be selected as the indicator of health impacts. It was found that in all the regions investigated, heat loads classified as "heavy" and "extreme" were associated with a clear deviation of actual mortality from the

¹ Corresponding Author: andreas.matzarakis@dwd.de, +49 69 8062 9610, Research Centre Human Biometeorology, German Biometeorological Service, Stefan-Meier-Str. 4, D-79104 Freiburg, Germany.

expectation value (Koppe 2005). On average days with a heavy heat load result in a mortality rate that is about 13% higher than the expected. (Koppe 2005, 2009). Even a moderate heat load is linked to a significant increased mortality.

As a consequence of the 2003 heat waves, many European weather services have set up HHWS. The HHWS can utilize weather forecast to predict specific periods of heat, which can have negative implications and impacts on human health (Koppe 2009). For protection of population appropriate communication strategies and a well-structured preparedness plan to trigger intervention measures need to be provided and established (Koppe 2009; Straff et al. 2017; Zielo and Matzarakis 2017; Matzarakis and Zielo 2017).

Methodology

The HHWS of the German Meteorological Service (DWD) consists of several components and includes both automatically generated information from the numerical weather forecasts and human consideration and decisions by biometeorologists. The HHWS includes also ways of communication and preventive actions to be taken. In the following, the processes included and involved are explained.

Perceived Temperature

There is knowledge and evidence that a single meteorological factor like air temperature is not appropriate to describe the entire effect extraordinary heat might have on the human body (Matzarakis 2013). Therefore the energy exchange between the human body and its environment, which takes place via short- and long wave radiation, the turbulent flows of sensible and latent heat including breathing, sweating and other energy fluxes, is applied. For the calculations of the energy balance of the human body, there are four basic meteorological variables: air temperature, mean radiant temperature (which considers short- and long wave radiation fluxes), air humidity, and wind speed at a human related height (Matzarakis 2007; Parsons 2003). Together with thermo-physiological factors like the metabolic rate and the clothing, these meteorological elements provide the six fundamental factors which define the conditions for energy/heat exchange between the human body and its environment (Matzarakis 2007; VDI 1998).

The method used by the German Meteorological Service for the health-relevant assessment of the thermal environment is Perceived Temperature (PT) (Jendritzky 1990; VDI 1998; Staiger et al. 2012). This is based on a complete energy budget model of the human body and takes into account all relevant mechanisms of heat exchange with the atmospheric environment. The computation of Perceived Temperature is based on a standard male, known as "Klima-Michel". This standard male chooses his clothing in order to remain in thermal comfort as far as possible, with a clothing value (clo) from 0.5 to 1.75. The Perceived Temperature (PT) is given in the dimension °C and can be summarized in terms of a scale of physiological stress or strain (Table 1).

Table 1. Perceived Temperature, thermal perception and physiological stress (after VDI 1998; Staiger et al. 2012)

Perceived Temperature (°C)	Thermal perception	Thermo-physiological strain
< -39	Very cold	-4: Extreme cold stress
-39 to -26	Cold	-3: Heavy cold stress
-26 to -13	Cool	-2: Moderate cold stress
-13 to 0	Slightly cool	-1: Less cold stress
0 to 20	Comfortable	0: No thermal stress
20 to 26	Slightly warm	1: Less heat load
26 to 32	Warm	2: Moderate heat load
32 to 38	Hot	3: Heavy heat load
≥ 38	Very hot	4: Extreme heat load

The calculation of Perceived Temperature is performed based on hourly data of the weather forecast of the German Meteorological Service and for heat warning the value of PT at 12 UTC is used with the warning criteria of classes of the heavy heat load (3) and extreme heat load (4) (Table 1). However, because days with at least a moderate heat load occur relatively frequently – between 30 and 40 times a year – "moderate heat load" is not suitable for use as a warning criterion; excessively frequent warnings may result in "warning fatigue", with people failing to take them seriously (Koppe 2009).

Short Time Acclimatization and Nocturnal Conditions

During summer, humans gradually become more acclimatized to high temperature conditions. Heat loss becomes more efficient, e.g. through an increase in the sweating rate. In order to account for this acclimatization, a procedure has been developed which allows the threshold value of the comfort range (Table 1) to be adjusted according to the thermal conditions of the last 30 days (Koppe 2005). The classification bands are maintained, however, and the threshold values for moderate, heavy and extreme stress shift accordingly (Koppe 2009). The thresholds for individual stress categories vary, in addition, from region to region: for example, they are generally higher in southwestern than in northern Germany in summer (Koppe 2009).

Implementation of Elderly Population

The adaptation possibility of elderly people is much lower than for healthy people, therefore the effect of heat stress is different. From thermos physiological perspective there is a reduction of the seat rate, reduction of elasticity of the blood vessel, lower skin and core temperature of the human body and limitations in blood circulation in general. In addition mobility is lower and therefore the walking speed is from 4 km/h much lower and about 1 km/h.

Nocturnal Conditions

For the night situation, the minimum temperature is considered, if it falls below a specific threshold (16–18 °C, depending on the region), as night-time cooling guarantees a recovery period (Koppe 2009). During long-lasting heat waves, acclimatization adjustment of the threshold values to weather conditions over recent weeks could well produce too high threshold value for "heavy heat load". Therefore, in order to ensure that warnings continue to be issued during this type of scenario, the warning threshold value is fixed at a maximum of 34 °C Perceived Temperature.

In addition, for a more appropriate description of the conditions indoors, information from a building simulation model that provides data about thermal conditions in the indoor environment is considered in issuing of the heat warning (Pfafferott and Becker 2008).

The building simulation model estimates the thermal indoor conditions. The year of construction and the material of the building give information about physical properties of the building (Rosenfelder et al. 2016). But also the quality of windows and shading, the user profile (presence of the person) and the user behaviour (opening and closing of windows and shading) are considered for the simulation of the indoor climate (Rosenfelder et al. 2016). Due to these possible combinations of user behaviour and building type, different heat stress situations can occur indoors during a hot period (Pfafferott and Becker 2008).

We defined a standard building in order to control the physical properties of the building structure. This standard building refers to a typical nursing facility. It describes a building constructed in the 1990s or later. The standard building is characterized by an air-proof facade and very little cross-ventilation. The natural ventilation is simulated as a system with an air flow network. This system is represented by a collection of nodes distributed in the modelled room. Inter-nodal connections represent the distributed flow paths associated with cracks, doors, windows etc. Because of the pressure difference between the nodes and the conservation of mass, a set of non-linear equations can be solved for each time step to characterize the flow throughout the network (Clarke and Hensen 1991).

The geometric model consists of two standard rooms in a nursing facility with the same base area of 14.25 m² and a height of 2.8 m connected by a corridor. The windows' opening section is 1.3 m² and describes two large windows positioned side by side that can either be totally opened or just tilted. Additionally, the window has double heat protection glass and external shading. Generally, this model accords to a good modern building standard in Germany.

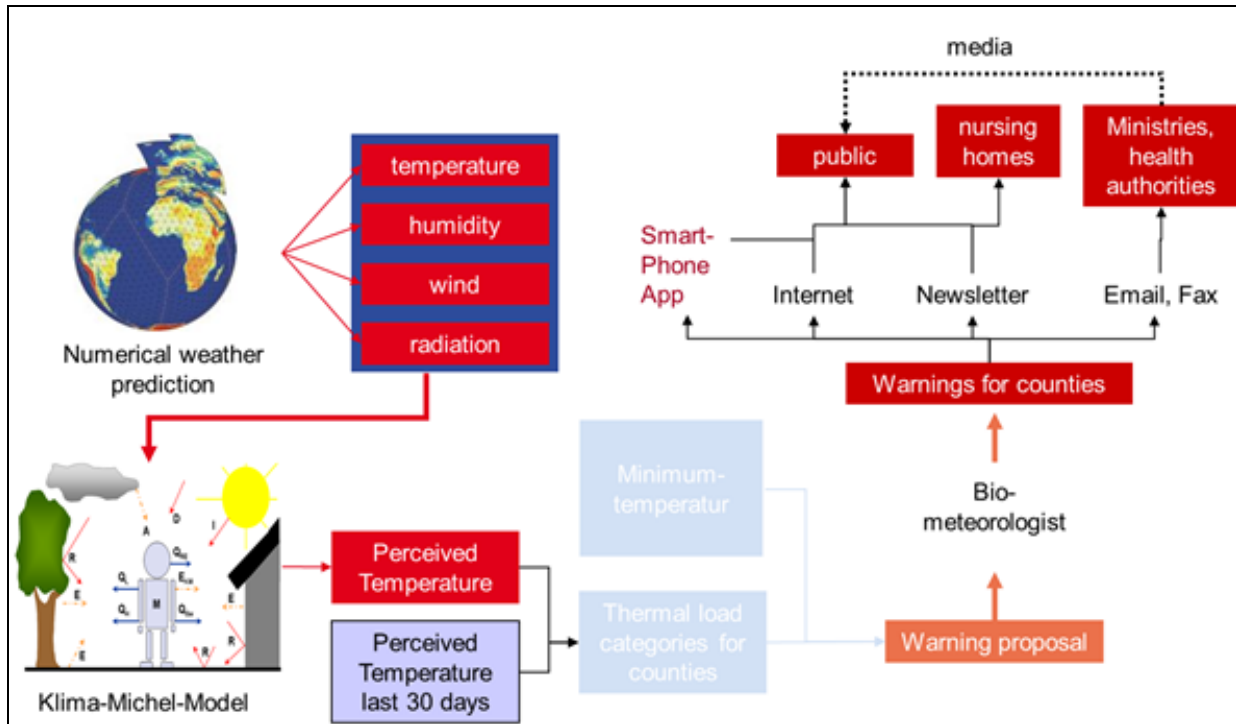


Figure 1. Workflow of HHWS and ways of communication

Implementation of Urban Heat Island

For a more comprehensive implementation of the night conditions in urban areas for cities over a population of 100.000 urban heat island, which are especially during heat waves more worse are considered. For the development of the urban heat island a number of impacts have to be considered such as the degree of sealed surface, built-up density, physical properties of building material, anthropogenic heat production. In addition the intensity of the urban heat island depends on different weather conditions, like cloudless and warm weather and wind speed and this not only for one specific day (Wienert et al. 2013). Based on the Wienert et al. (2013) approach, which is valid for cities with a population over 100.000, the heat health warning system is able to deliver specific conditions during the night are now expanded with this information, which is helpful for the decision about the indoor conditions. This means that the weather forecast is modified for cities with an additional rate of the urban heat island, which can have an effect on the indoor conditions.

Warning Criteria

Based on the above automated factors, the biometeorologist considers the preliminary warning proposal, adjusts and modifies it, if needed, and – most importantly – decides about issuing the warning. On each day that the Perceived Temperature at 12.00 Universal Time Coordinated (UTC) exceeds the warning threshold, a warning is issued by the DWD at around 10 a.m. The warning covers a two day period. The information pathways are followed when the

"heavy heat load" threshold is exceeded. Based on numerical weather prediction for the next 48 hours, the model calculates whether the "heavy heat load" warning threshold will be exceeded in the individual counties across Germany, and up to which altitudes. This generates a warning recommendation which is then reviewed by bio-meteorologists. They have the option to accept the recommendation to issue a warning, and they can also add warnings of their own if, in their view, a critical situation could arise (Koppe 2009). The warning is valid on county level including several elevation classes.

Communication and Application of Warnings

The warnings generated in this way are published on the DWD website (<http://www.dwd.de/gesundheit>). The heat warning is available as maps and registered users can receive information by daily newsletter. A specific smartphone application is also available for general use. The main target groups are the public, nursing homes and ministries of the federal states and other authorities. The relevant health and supervisory authorities are also notified; they are responsible for drawing up a list of intervention measures and monitoring their implementation. There is also the option of broadcasting the warning more widely to the public on radio and television. In addition to the heat warning for the next 48 hours, the DWD provides heat load information for the next 2–7 days. In addition the warning includes information about the number of days of heat warning.

Discussion and Conclusion

Nowadays it is important, to, not only issue warnings about high air temperatures but also to consider other meteorological parameters that influence the energy balance of the human body (Matzarakis 2007, Koppe 2009). The DWD applies the Perceived Temperature for this purpose. When issuing heat warnings, the threshold values that must be exceeded in order to trigger a warning are adjusted to local weather conditions over the past 30 days. This adjustment is necessary to take account of the fact that the human body adapts to its thermal environment (acclimatisation). For a southern European, for example, a Perceived Temperature of 30 °C is a common condition, whereas for people in northern Germany, such temperatures may result in considerable physical stress.

Evaluations of the HHWS in the Federal State of Hessen show that the system is working effectively, especially in the area of residential elderly care. There is a clear signal that the number of admissions has fallen significantly (Koppe 2009). This shows that the measures taken in Hessen in response to heat warnings have successfully reduced the number of heat-related health complaints. Additionally a high awareness and acceptance of the HHWS has been lately confirmed by a project of the Federal Environmental Agency, where the current warning systems in Germany were assessed (Capellaro and Sturm 2015).

In view of the climate change and the prospect of more frequent and intensive heat waves, it is important to develop such intervention measures further and extend them to other areas outside residential care. Although the elderly are classed as particularly vulnerable, other groups of person can suffer during heat waves, as well.

References

- Capellaro M, Sturm D (2015) Evaluation of Information Systems Relevant to Climate Change and Health. Volume 1: Adaption to Climate Change: Evaluation of Existing National Information Systems (UV-Index, Heat Warning System, Airborne Pollen, Ozone Forecasts) from a Public Health Perspective – How to Reach Vulnerable Populations. Umwelt und Gesundheit 03/2015.
- Clarke JA, Hensen JLM (1991) An approach to the simulation of coupled heat and mass flows in buildings. Indoor Air 3: 283–296.
- IPCC (2007) Climate Change 2007: Impacts, Adaptation and Vulnerability. Contribution of Working Group II to the Fourth Assessment Report of the Intergovernmental Panel on Climate Change. Eds.: Parry ML, Canziani OF, Palutikof JP, van der Linden PJ, Hanson CE. Cambridge University Press. Cambridge, UK.
- Jendritzky G (1990) Methodik zur räumlichen Bewertung der thermischen Komponente im Bioklima des Menschen – Fortgeschriebenes Klima-Michel-Modell. Beitr. Akademie f. Raumforschung u. Landesplanung 114:7-69.
- Koppe C (2005) Gesundheitsrelevante Bewertung von thermischer Belastung unter Berücksichtigung der kurzfristigen Anpassung der Bevölkerung and die lokalen Witterungsverhältnisse. Berichte des Deutschen Wetterdienstes 226. Offenbach am Main.
- Koppe C (2009) The Heat Health Warning System of the German Meteorological Service. In: UMID Special Issue: Climate Change and Health 3: 39-43.
- Larsen J (2006) Setting the Record Straight: More than 52,000 Europeans Died from Heat in Summer 2003. Earth Policy Institute, http://www.earth-policy.org/plan_b_updates/2006/update56 (last access at 01.10.2014).
- Matzarakis A (2007) Climate, human comfort and tourism. In: Amelung B, Blazejczyk K, Matzarakis A (eds.) Climate Change and Tourism: Assessment and Coping Strategies. 139-154.
- Matzarakis A (2013) Stadtklima vor dem Hintergrund des Klimawandels. Gefahrstoffe – Reinhaltung der Luft 73, 115-118.
- Matzarakis A (2016) Das Hitzewarnsystem des Deutschen Wetterdienstes (DWD) und seine Relevanz für die menschliche Gesundheit. Gefahrstoffe – Reinhaltung der Luft 76, 457-460.
- Matzarakis A (2017) The Heat Health Warning System of DWD – Concept and Lessons learned. In: Karacostas et al., (Eds) Perspectives in Atmospheric Sciences. Springer Atmospheric Sciences, 191-196.
- Matzarakis A, Koppe C (2016) Hitzewellen – eine zunehmende Gesundheitsgefahr. Internistische Praxis 56, 585-592.

- Matzarakis A, Zielo B (2017) Maßnahmen zur Reduzierung von Hitzebelastungen für Menschen – Bedeutung von Hitzeaktionsplänen. *Gefahrstoffe – Reinhaltung der Luft* 77, 316-320.
- Matzarakis A, Muthers S, Koch E (2011) Human-biometeorological evaluation of summer mortality in Vienna. *Theoretical and Applied Climatology* 105: 1-10.
- Muthers S, Matzarakis A, Koch E (2010) Climate Change and Mortality in Vienna—A Human Biometeorological Analysis Based on Regional Climate Modeling. *Int. J. Environ. Res. Public Health* 7: 2965-2977.
- Muthers S, Laschewski G, Matzarakis A (2017) The Summers 2003 and 2015 in South-West Germany: Heat Waves and Heat-Related Mortality in the Context of Climate Change. *Atmosphere* (11), 224, 1-13.
- Parsons KC (2003): Human thermal environments: the effects of hot, moderate, and cold environments on human health, comfort and performance. 2nd edition. Taylor & Francis. London.
- Pfafferott J, Becker P (2008) Erweiterung des Hitzewarnsystems um die Vorhersage der Wärmebelastung in Innenräumen. *Bauphysik* 30: 237-243.
- Rosenfelder M., Koppe C., Pfafferoth J, Matzarakis A (2016) Effects of ventilation behavior on indoor heat load based on test reference years. *International Journal of Biometeorology* 60: 277-287.
- Staiger H, Laschewski G, Grätz A (2012) The Perceived Temperature – A versatile index for the assessment of the human thermal environment Part A: Scientific Basics. *International Journal of Biometeorology* 56: 165–176.
- Straff W, Mücke H-G, Baeker R, Baldermann C, Braubach A, Litvinovitch J, Matzarakis A, Rexroth U (2017) Handlungsempfehlungen für die Erstellung von Hitzeaktionsplänen zum Schutz der menschlichen Gesundheit. *Bundesgesundheitsblatt-Gesundheitsforschung-Gesundheitsschutz* 60, 662-672.
- VDI (1998) Methods for the human biometeorological evaluation for climate and air quality for the urban and regional planning. Part I: climate. VDI guideline 3787. Part 2. Berlin, Beuth
- Wienert U, Kreienkamp, F, Spekat A, Enke W (2013) A simple method to estimate the urban heat island intensity in data sets used for the simulation of the thermal behavior of buildings. *Meteorologische Zeitschrift* 22, 179-185.
- Zielo B, Matzarakis A (2017) Bedeutung von Hitzeaktionsplänen für den präventiven Gesundheitsschutz in Deutschland. *Gesundheitswesen* 79, 1-10.